
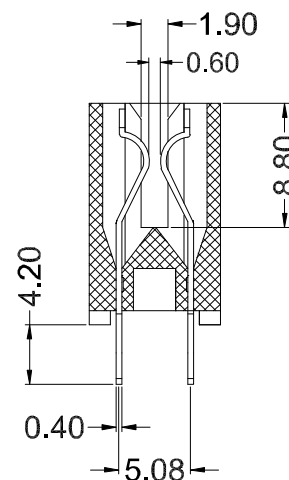


绝缘体 Insulator: Glass filled PBT UL94V-0, Black  
 接触件 Contacts: Brass or Phosphor Bronze  
 电镀层 Plating Contact Gold and Dip Tin over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA  
 绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC  
 耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute  
 工作电流 Current Rating: 2 AMP  
 使用温度范围 Operating Temperature: -55°C~+105°C

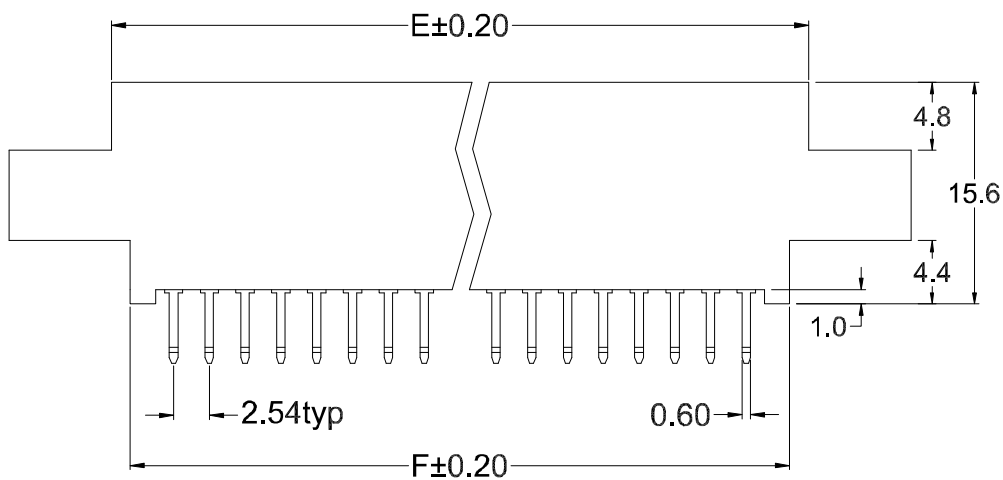

Dimension

Position	A	B	C	D	E	E
24*	51.24	44.74	33.34	27.94	36.74	34.24
44	76.64	70.14	58.74	53.34	62.14	59.64
48*	81.72	75.22	63.82	58.42	67.22	64.72
56	91.88	85.38	73.98	68.58	77.38	74.88
60	96.96	90.46	79.06	73.66	82.46	79.96
72	112.20	105.70	94.30	88.90	97.70	95.20
86	129.98	123.48	112.08	106.68	115.48	112.98
100	147.76	141.26	129.86	124.46	133.26	130.76

				PRODUCT 产品名称	With Mounting Ears SOLT-2.54mm S-2.54带耳总线		GENERAL TOLERANCE x.: ±0.3 x.x: ±0.2 x.xx: ±0.1	DESIGNED 设计	chizon CHIZON(CI XI) ELECTRONIC CO.,LTD. 啓宸(慈溪)电子有限公司					
				SERIES NO 序列号	QC920B		ANGLE TOLERANCE x.: ±2° x.x: ±1° x.xx: ±0.5°	DRAWING 制图						
				CUSTOMER P/N 客户料号	S-2.54-44PT		CHECKED 审核			DRAWING NO.		REV.	0	
标记	处数	描述	更改文件号	签字	日期	UNITS 单位	mm	SCALE 比例	2:1	PROJECTION	APPROVED 核准		G.x.zhang	
										SHEET SIZE		A4	SHEET	1 OF 1
										COMPUTER NO.		F / denk / 工程图 / SOLT		