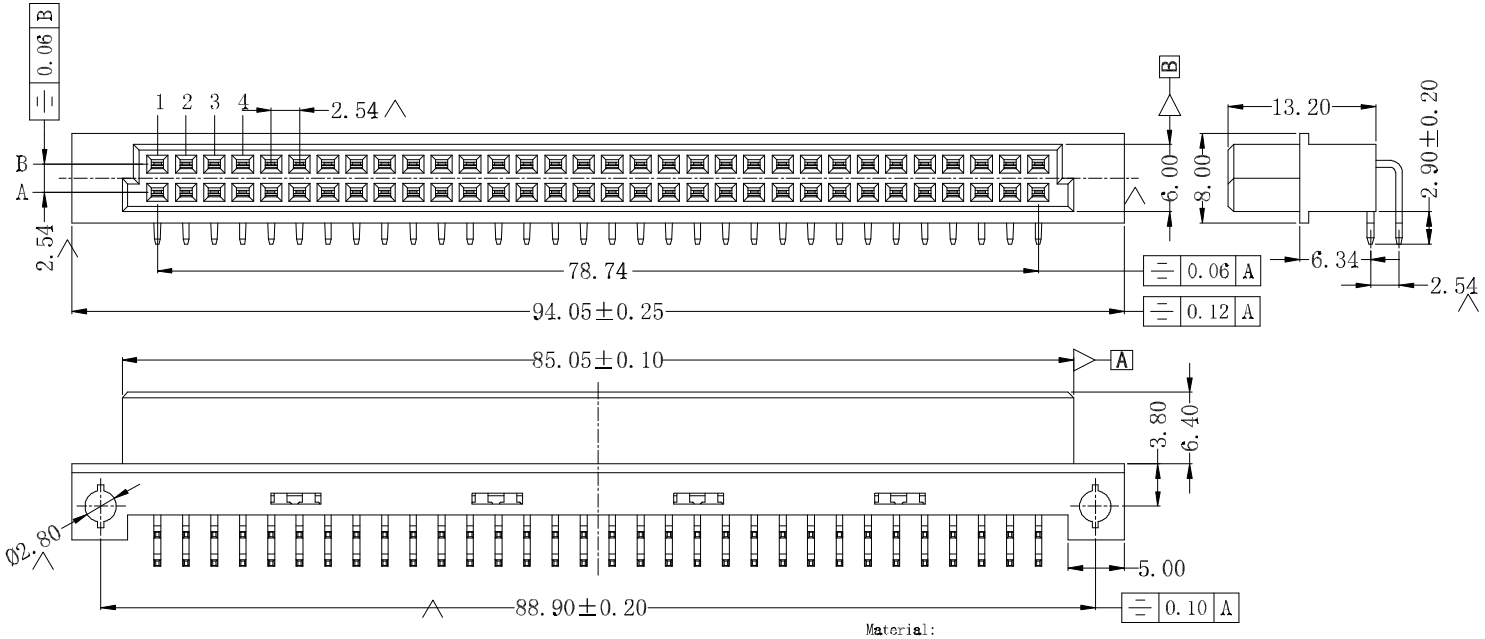

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	64	A B	
	32	A -	
5.08	32	A B	
	16	A -	

Material:
Housing: PBT+GF30% UL94V-0,COLOR:WHITE;
Contacts: Brass T=0.60.

Finish:
Contact: Gold2~3u" Plated over Nickel 80~100u"

Specification:
Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩmin. at DC 500V.
Contact Resistance: 30mΩMax.at DC 100mA.
Operating Temperature: -55° C~+105° C
Control Dimensions Indicated From".
Withdrawal Force: 2.0-3.0Kg.

				TITLE	DIN-264母90度	GENERAL TOLERANCE	DRAWN BY	DATE	CHIZON(CI XI) ELECTRONIC CO.,LTD.		
				SERIES	QC9264FR	x. ± ±0.3 x.x± ±0.2 x.xx± ±0.1	CHECKED BY	DATE	啓宸（慈溪）電子有限公司		
				CUSTOMER P/N		ANGLE TOLERANCE					
				UNITS	mm	PROJECTION	APPROVED BY	DATE	DRAWING NO.	SHEET	1 OF 1
SCALE	DESCRIPTION	CHK	DATE	SCALE	1:1	x. ± ±2° x.x± ±1° x.xx± ±0.5°	2022.07.25 G.x.zhang		SHEET SIZE A4	REV.	A0