


Material:
 Housing: PBT+GF30% UL94V-0, COLOR: WHITE;
 Contacts: Brass T=0.80.
 Finish:
 Contact: Gold2~3u" Plated over Nickel 80~100u"

Specification:
 Electrical Characteristics:
 Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩmin. at DC 500V.
 Contact Resistance: 30mΩMax. at DC 100mA.
 Operating Temperature: -55 °C~+105 °C
 Control Dimensions Indicated From".
 Withdrawal Force: 2.0-3.0Kg.

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	64	A B	
	32	A -	
5.08	32	A B	
	16	A -	

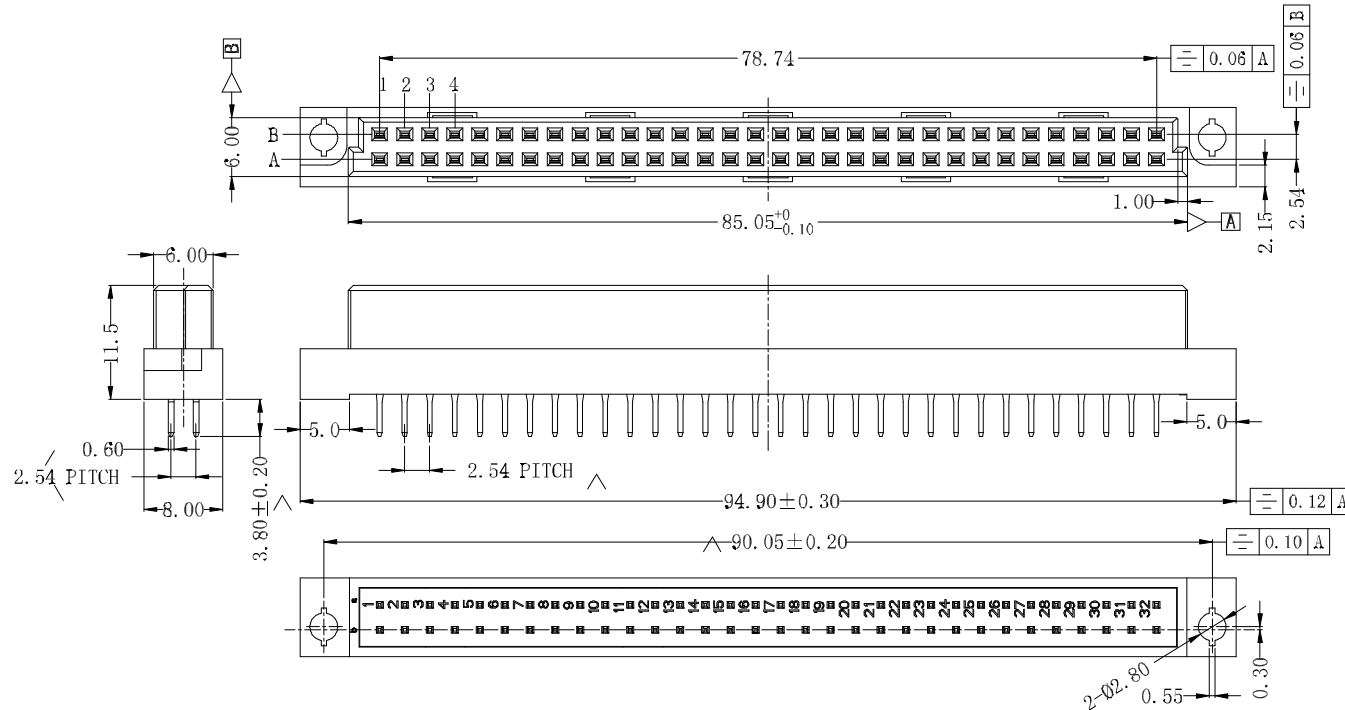

				TITLE		DIN-264母180度		GENERAL TOLERANCE		DRAWN BY		DATE		CHIZON CHIZON(CI XI) ELECTRONIC CO.,LTD. 啓宸(慈溪)電子有限公司	
				SERIES		QC9264FS		x.: ±0.3 x.x: ±0.2 x.xx: ±0.1		CHECKED BY		DATE			
				CUSTOMER P/N				ANGLE TOLERANCE		APPROVED BY		DATE		DRAWING NO.	
				UNITS		mm		x.: ±2° x.x: ±1° x.xx: ±0.5°		2022.07.25		G.x.zhang		SHEET 1 OF 1	
SCALE				DESCRIPTION		CHK		DATE		SCALE		1:1		PROJECTION	
												SHEET SIZE		A4	
												REV.		A0	