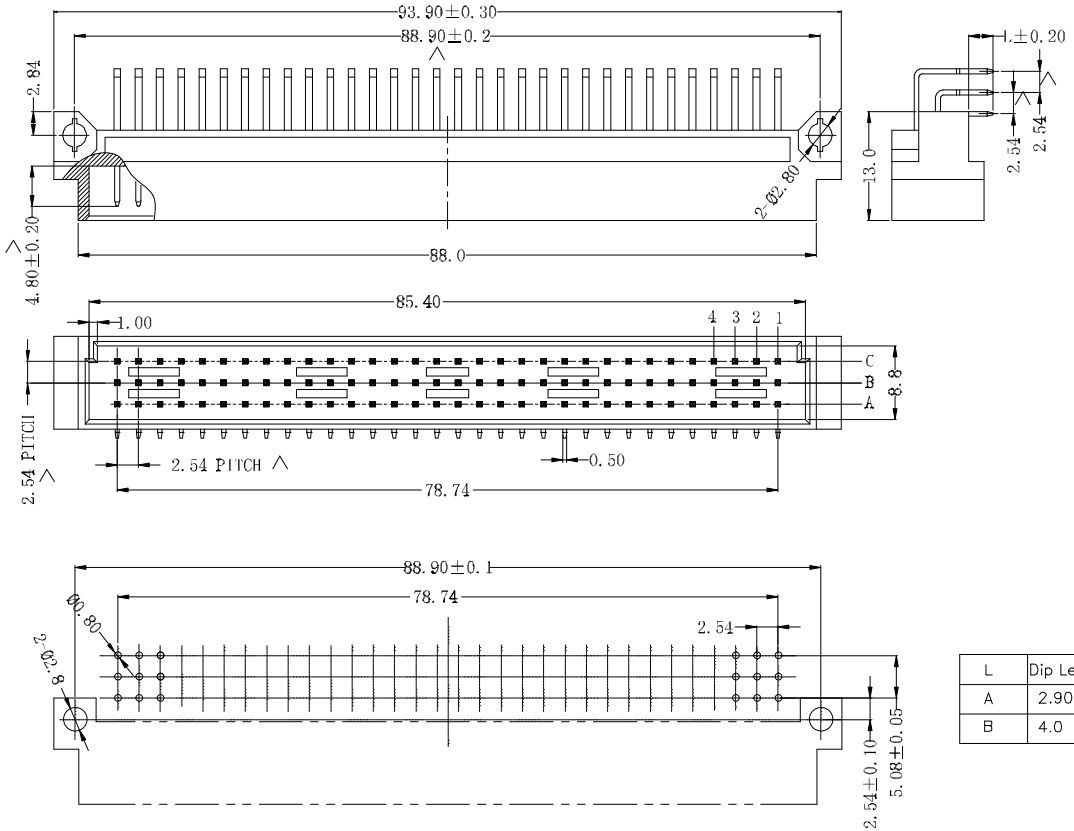

MOUNTING HOLES
(BOTTOM VIEW)

Material:
Housing: PBT+GF30% UL94V-0, COLOR:WHITE;
Contacts: Brass T=0.60.

Finish:
Contact: Gold2~3u" Plated over Nickel 80~100u"

Specification:
Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩmin. at DC 500V.
Contact Resistance: 30mΩMax. at DC 100mA.
Operating Temperature: -55°C~+105°C
Control Dimensions Indicated From".

L	Dip Length
A	2.90
B	4.0

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	A B C	
	64	A B -	
	64	A - C	
	32	A - -	
5.08mm	48	A B C	
	32	A B -	
	32	A - C	
	16	A - -	

TITLE	DIN-396公90度		
SERIES	QC9396MR		
CUSTOMER P/N			
UNITS	mm	PROJECTION	
SCALE	1:1		

GENERAL TOLERANCE
x. : ±0.3
x.x: ±0.2
x.xx: ±0.1

ANGLE TOLERANCE
x. : ±2°
x.x: ±1°
x.xx: ±0.5°

DRAWN BY DATE
CHECKED BY DATE
APPROVED BY DATE
2022.07.25 G.x.zhang

chizon CHIZON(CI XI) ELECTRONIC CO.,LTD.
啓宸（慈溪）電子有限公司

DRAWING NO.		SHEET	1 OF 1
SHEET SIZE	A4	REV.	A0

SCALE	DESCRIPTION	CHK	DATE