


接点示意图:

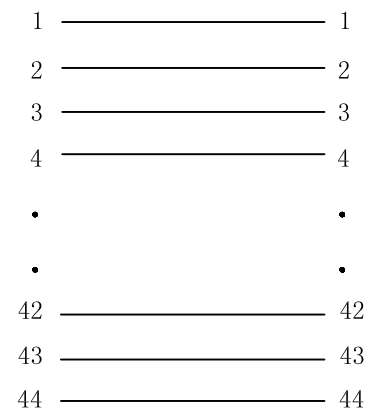

塑胶座与排线要平行, 不可歪斜.

ELECTRICAL CHARACTER:

1. 100% OPEN/SHORT TEST.
2. DC TEST 30V/10ms.
3. INSULATION RESISTANCE: 5M OHM/Min.
4. CONDUCTANCE RESISTANCE: 5. OHM/Max

3	MFC44P to MFC44P L=116MM	
2	2*22P IDC PH:2.0 有耳 两件式 黑色	2
1	UL2651 28AWG*44Ways PH:1.0 灰色 带红边L=124.5MM	1
ITEM	DESCRIPTIONS	PART NO, QTY

TITLE		2.00-IDC-排线		GENERAL TOLERANCE		DRAWN BY		DATE		 CHTON(CI XI) ELECTRONIC CO., LTD. 啓宸(慈溪)电子有限公司	
SERIES		QC103-P		x. : ±0.3 x.x: ±0.2 x.xx: ±0.1		CHECKED BY		DATE			
CUSTOMER P/N				ANGLE TOLERANCE		APPROVED BY		DATE		DRAWING NO.	
UNITS		mm		x. : ±2° x.x: ±1° x.xx: ±0.5°		SHEET		1 OF 1		SHEET SIZE	
SCALE		1:1		PROJECTION		REV.		A0		A0	
SCALE	DESCRIPTION	CHK	DATE	SCALE	1:1	7		8		8	