


P.C.Board Layout

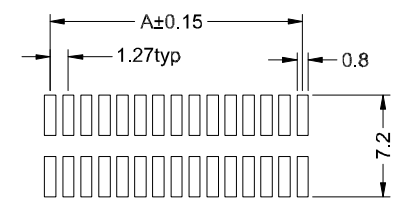

P.C.Board Layout

材质 Material:
 绝缘体 Insulator: Glass filled PBT UL94V-0
 接触件 Contacts: Brass
 电镀层 Plating: Whole Gold plated over Nickel

电气性能 Electrical Characteristics:
 接触电阻 Contact Resistance: 20mΩmax. at DC 100mA
 绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC
 耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute
 工作电流 Current Rating: 1 AMP
 使用温度范围 Operating Temperature: -55°C~+105°C

position	A	B	C
06	2.54	18.31	12.81
08	3.81	19.58	14.08
10	5.08	20.85	15.35
12	6.35	22.12	16.62
14	7.62	23.39	17.89
16	8.89	24.66	19.16
18	10.16	25.93	20.43
20	11.43	27.20	21.70
26	15.24	31.01	25.51
30	17.78	33.55	28.05
34	20.32	36.09	30.59
40	24.13	39.90	34.40
44	26.67	42.44	36.94
50	30.48	46.25	40.75
60	36.83	52.60	47.10
64	39.37	55.14	49.64
68	41.91	57.68	52.18

				TITLE EJECTOR HEADER 1.27*1.27mm 1.27/DC2型牛角插针		GENERAL TOLERANCE x.: ±0.3 x.x.: ±0.2 x.xx.: ±0.1		DRAWN BY DATE		chizon CHIZON(CI XI) ELECTRONIC CO.,LTD. 啓宸(慈溪)电子有限公司	
				SERIES QC206		ANGLE TOLERANCE x.: ±2° x.x.: ±1° x.xx.: ±0.5°		CHECKED BY 張國校 DATE			
				CUSTOMER P/N		APPROVED BY DATE		DRAWING NO.		SHEET 1 OF 1	
SCALE	DESCRIPTION	CHK	DATE	SCALE 2:1	PROJECTION			SHEET SIZE A4		REV. A0	