


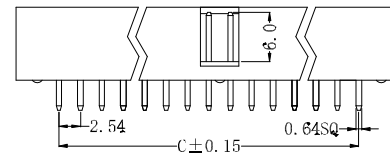

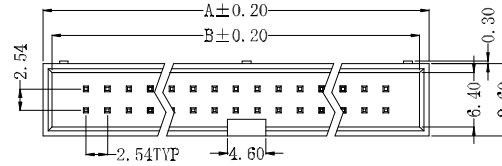


**Straight Type**






**Long Dip**

**Right Angle Type**



**Surface Mount Type**



**P.C.B Layout**

**材质 Material:**

绝缘体 Insulator: Glass filled PBT UL94V-0 ,Black

接触件 Contacts: Brass

电镀层 Plating: Whole Gold plated over Nickel

**电气性能 Electrical Characteristics:**

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA

绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC

耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute

工作电流 Current Rating: 2 AMP

使用温度范围 Operating Temperature: -40℃ ~ +105℃

**Dimension**

position	A	B	C
06	15.24	13.04	5.08
08	17.78	15.58	7.62
10	30.32	18.12	10.16
14	25.40	23.20	15.24
16	27.94	25.74	17.78
20	33.02	30.82	22.86
24	38.10	35.90	27.94

position	A	B	C
26	40.64	38.44	30.48
30	45.72	43.52	35.56
34	50.80	48.60	40.64
40	58.42	56.22	48.26
50	71.12	68.92	60.96
60	83.82	81.62	73.66
64	88.90	86.70	78.74

				TITLE	BOX HEADER 2.54mm (0.100")		GENERAL TOLERANCE		DRAWN BY		DATE				
				DC3型筒牛插针				×. : ±0.3		张國校		DATE			
				SERIES	QC301		×.×: ±0.2		APPROVED BY		DATE				
				CUSTOMER P/N				×.××: ±0.1		DATE		DRAWING NO.			
				UNITS	mm		ANGLE TOLERANCE		DATE		SHEET		1 OF 1		
SCALE				1:1		PROJECTION		×. : ±2°		SHEET SIZE		A4		REV.	
								×.×: ±1°				A0			
								×.××: ±0.5°							

chizon CHIZON(CI XI) ELECTRONIC CO.,LTD.  
啓宸(慈溪)電子有限公司