

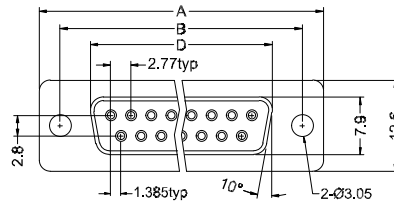




Male



Female



材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0 ,Blue
 接触件 Contacts: Brass or Phosphor Bronze
 电镀层 Plating Contact Gold and Weld Tin over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA
 绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC
 耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute
 工作电流 Current Rating: 3 AMP

使用温度范围 Operating Temperature: -40°C ~ +105°C

常规表达: DB-09M (09F)

Dimension

| Position | A | B | C | D(M) | D(F) |
|----------|-------|-------|-------|-------|-------|
| 09 | 30.81 | 24.99 | 19.36 | 16.92 | 16.33 |
| 15 | 39.14 | 33.32 | 27.64 | 25.25 | 24.66 |
| 25 | 53.04 | 47.04 | 41.08 | 38.96 | 38.38 |
| 37 | 69.32 | 63.50 | 57.38 | 55.42 | 54.84 |

| | | | | | | | | | | | | | | | | |
|-------|-------------|--|--|--------------|-------------------|-------|--|-----------|-------------|------|---|--|--|-------------|-------|--------|
| | | | | TITLE | D-SUB SOLDER TYPE | | GENERAL TOLERANCE x.: ±0.3 x.x: ±0.2 x.xx: ±0.1 | | DRAWN BY | DATE | CHIZON CHIZON(CI XI) ELECTRONIC CO.,LTD. 啓宸(慈溪)電子有限公司 | | | | | |
| | | | | SERIES | QC8002 | | ANGLE TOLERANCE x.: ±2° x.x: ±1° x.xx: ±0.5° | | CHECKED BY | DATE | | | | DRAWING NO. | SHEET | 1 OF 1 |
| | | | | CUSTOMER P/N | | | | | APPROVED BY | DATE | | | | SHEET SIZE | REV. | A0 |
| SCALE | DESCRIPTION | | | CHK | DATE | SCALE | 1:1 | G.x.zhang | | | | | | | | |